

NOTES
We recommend that the tub is attached to the floor.
There are leveling pads under the claw feet and under the pedestal base.
The most convenient method for fixing is to add a small amount of epoxy to the bottom of the leveling pad making contact with the floor.

The pedestal base also has two clips at the drain area for screwing to the floor if required.
If you prefer to screw a clawfoot tub to the floor, please inform us and we will include brackets to attach to the leveling pads under the claw foot.

MODEL #.....

SERIAL #.....

DATE OF MANUFACTURE.....





MEETS ANSI Z124.1.2-2005, CSA B45.0-02 & CSA B45.5-02

HLPD59 Double Ended Pedestal Tub



Weight	138 lbs
Gallons to Overflow	71
Weight Full to Overflow	695 lbs
Min. Wall Thickness	3/4"
Reinforced Floor in Tub	YES
Aluminum Heat Barrier (with narrow air gap)	YES
Slip Resistant Floor	YES
High Gloss Finish Interior & Exterior	YES
Available with Exterior Shell Painted	YES

Meets or Exceeds ANSI Z124.1.2-2005: CSA B45.0-02 & CSA B45.5-02

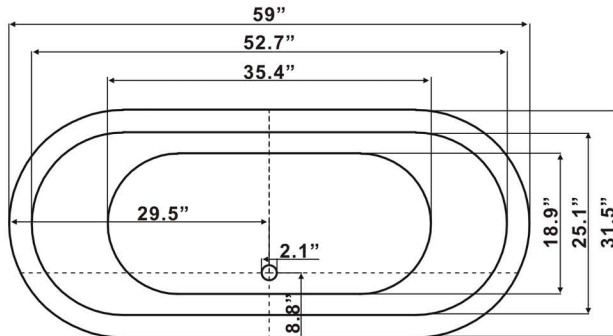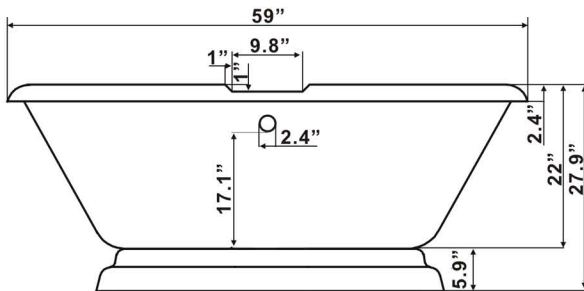

HLDBLPD59