


1. Deck mount supply lines (no valves)

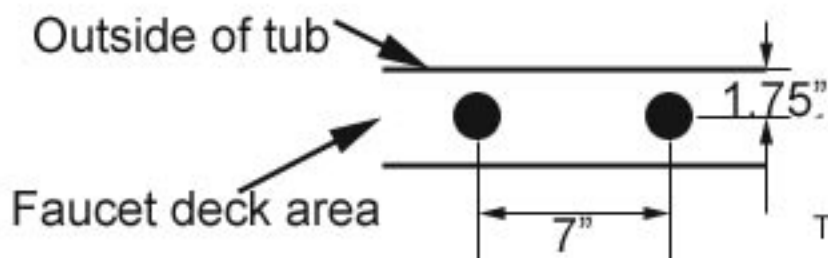

This rough-in is for all deck mount style tubs

For supply lines without valves, the floor connection should be prepared with 1/2" male pipe nipples protruding no more than 3/4" above the finished floor.

2. Deck mount supply lines with valves

For supply lines with valves, the floor connection should be prepared with 1/2" female pipe threaded sockets protruding no more than 3/4" above the finished floor.. The rough-in dimensions will be as shown in 1 above.

3. Freestanding over tub supply lines with valves

This can often be a customer choice. The freestanding lines are supplied with options on nipple lengths running to the faucet from the uprights. The centre dimensions will be 7" as shown in 1 above, but the distance from the outside lip of the tub can be between 2" and 5" depending on personal choice. The floor connection should be prepared with 1/2" NPT female fittings between 1/2" and 3/4" under the finished floor level.