

EF10TW Edwardian Tub Faucet Wall Mount



Integrated Handheld Shower
 ANSI Approved Back-flow Prevention
 Deck Mounted or Wall Mounted
 1/4 Turn Ceramic Valves
 8 Gallons Per Minute @ 60 psi
 1/2" Male Connectors Supplied

Product is approved and listed in compliance with the flowing standards:

ASME A112.18.1-2018/CSA B125.1-18

MA Code Accepted

MA acceptance requires a thermostatic control valve at the hot water source

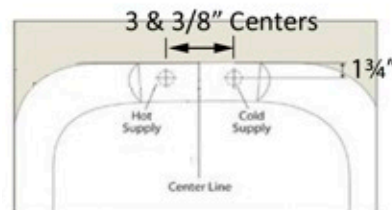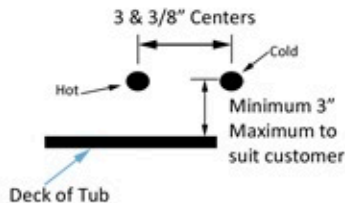

Measurements to be used for rough in plumbing only

For Wall Mount, we recommend a minimum center height of 3" above the tub deck on 3&3/8" centers. Tub distance from the wall should be no greater than 5".

Deck Mount rough-in on Hotel Collection tubs.