

Hotel Collection™ Soak & Jetted Tubs

Baths of Distinction Inc.

5843 Carrier St N, St. Petersburg, Florida, USA 33714

1.866.938.3880

Claw Foot & Pedestal Tub Assembly

All Tubs meet or exceeds ANSI Z124.1.2; CSA B45.0-02 & CSA B45.5-02 (Certified IAPMO R&T Labs)

All faucets and hardware supplied cUPC listed



TABLE OF CONTENTS

Introduction	: Page 1
Table of Contents	: Page 2
Clawfoot Tub	: Pages 3, 4 & 5
Pedestal Tub	: Pages 6, 7 & 8

CLAWFOOT TUB FOOT CONNECTION

1. Place your tub upside down on a soft surface.
2. Remove the stud covers and the nuts and washers from the studs on the bottom of the tub



3. Loosely attach the bars to the base of the tub. Don't tighten fully as you will need to adjust later. If your tub is double ended, it will only have two straight bars, no V bars as shown in this generic photo.



4. Place the claw foot in position. Hold the claw foot in position against the tub as you screw in the foot fixing bolt.



CLAWFOOT TUB FOOT CONNECTION

5. Place the lock washer on the bolt. Apply Lock-tight to the bolt for added security.





6. Tighten the claw foot fixing bolt; make sure it fits well against the tub. If the foot doesn't fit well, adjust by sliding the holding bar. When everything fits well, tighten the nuts fully to studs on the tub.



7. Adjust bolts at feet to level the tub.




CLAWFOOT TUB FOOT CONNECTION


<p>8. Position the tub in place and mark off two opposing holes for fixing to floor. Move the tub away and drill the holes.</p>	
<p>9. Move the tub back into place. Tighten screw to the floor. Use a fixing screw or bolt to suit your floor material.</p>	
<p>10. To complete your package purchase, attach the faucet, drain and supply lines to your tub as shown on the individual item manuals.</p>	
<p>We strongly recommend that you use a licensed, qualified installer.</p>	

PEDESTAL TUB BASE CONNECTION

1. Place the pedestal upside down on a soft surface. Use a level to adjust the frame support legs to be level with the pedestal base. All four points highlighted here in yellow should be touching the level. If for any reason the black pads on the feet do not allow the pedestal to sit flat, these can be ground down to suit.

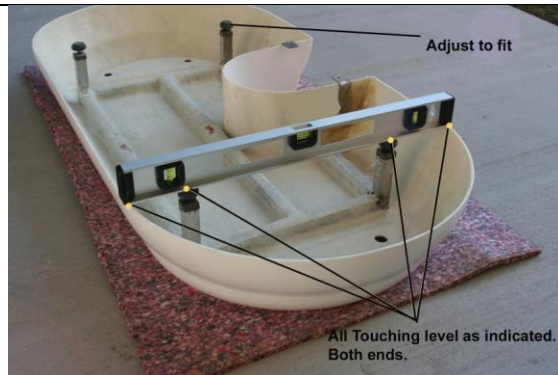

2. Place the base in position and level from all sides

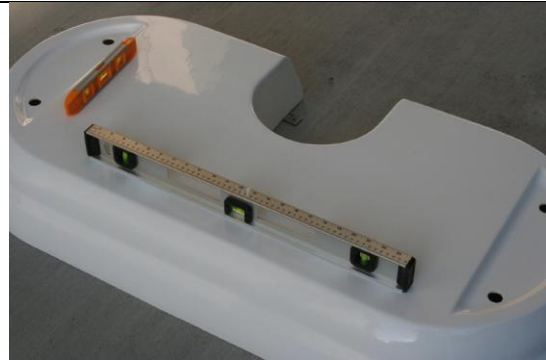

3. Make fine adjustments to the adjustable legs to ensure all four connect to the floor to make the tub base stable.



4. Mark off the holes for fixing the tub base to the floor.



PEDESTAL TUB BASE CONNECTION

5. Turn the tub over and place on a soft surface. Remove the bolt protection covers.



6. Remove the nuts and washers from the fixing bolt.




7. Place the pedestal onto the tub and attach it to the tub using the nuts and washers just removed.



8. Turn the tub upright and position it over the drilled fixing holes. Use a screw or bolt to suit your floor material.



PEDESTAL TUB BASE CONNECTION

<p>9. While not essential, you may choose to caulk around the base of the pedestal.</p>	
<p>10. To complete your package purchase, attach the faucet, drain and supply lines to your tub as shown on the individual item manuals.</p>	
<p>We strongly recommend that you use a licensed, qualified installer.</p>	

GENERAL CARE

Warning; In order to preserve the glossy acrylic finish of your new bathtub, never use abrasive cleaners containing a scouring powder. Never use steel wool, acetone, window cleaning products, ammonia, paint thinner, mineral oil on your bathtub or fixtures or trim.

1. **Cleaning your Bathtub;** Clean your bath after each use. A soft sponge and a liquid detergent like Simple Green, Greased Lightning etc. with warm water will serve to maintain the cleanliness of your tub. Make certain that your chosen detergent is suitable for use on acrylic surfaces.